



Designed by: QT Fabrics

QUILT SIZE 48" x 54"

Christine
Graf

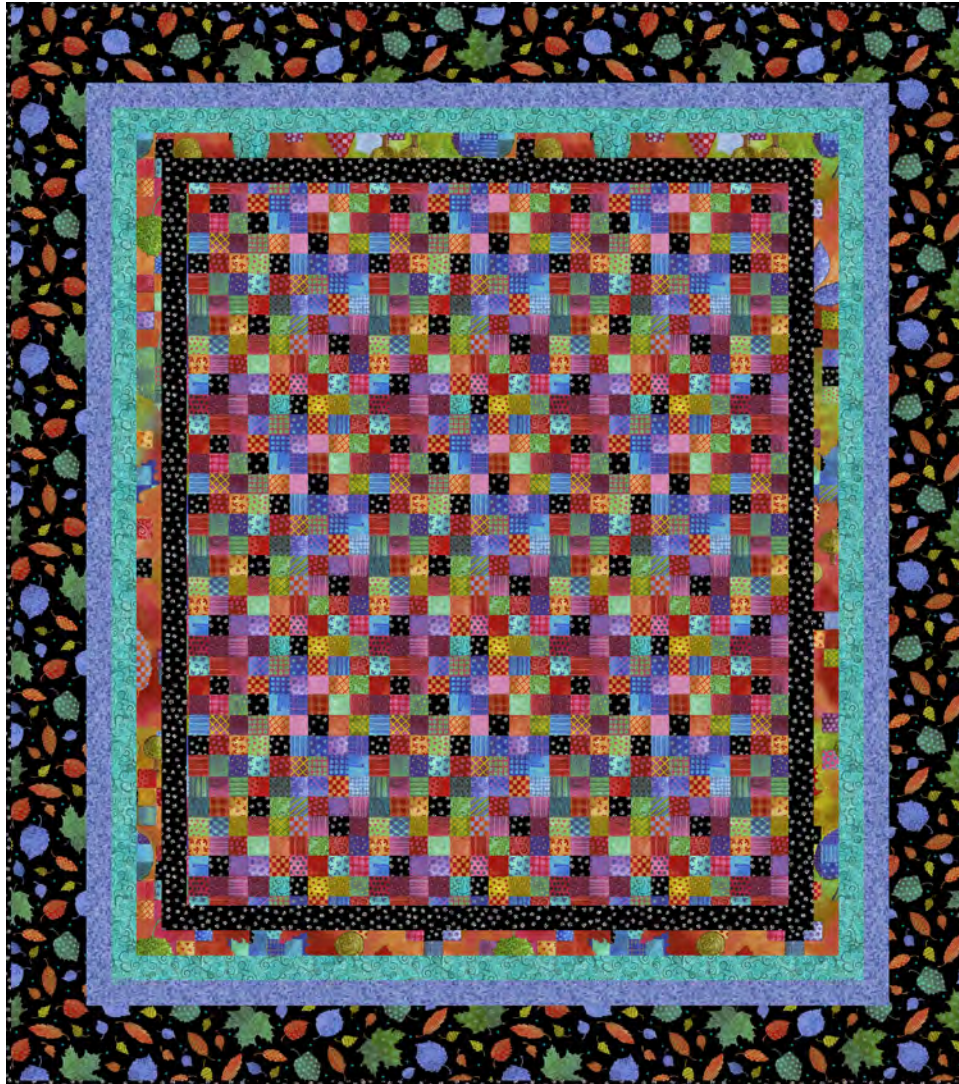

Finished Size: 48" x 54"

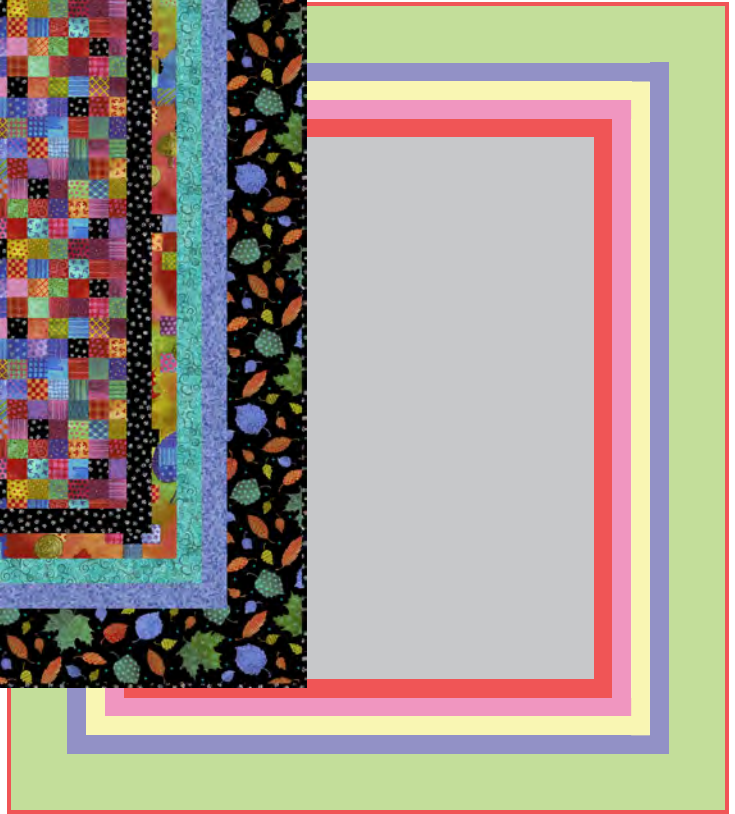

FABRIC REQUIREMENTS

	<p>Fabric A 28588 X 1 YARD</p> <p>1 BOLT</p>		<p>Fabric B 28591 J 2/3 YARD*</p> <p>1 BOLT</p>		<p>Fabric C 28586 X 1/4 YARD</p> <p>1 BOLT</p>		<p>Fabric D 28590 Q 1/4 YARD</p> <p>1 BOLT</p>
	<p>Fabric E 28528 LB 1/3 YARD</p> <p>1 BOLT</p>		<p>Fabric F 28587 J 3/4 YARDS</p> <p>1 BOLT</p>		<p>Fabric G 28591 X 3 YARDS**</p> <p>3 BOLTS</p>	<p>* includes binding ** backing</p>	

* Numbers within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

CUTTING DIRECTIONS

WOF = Width of fabric from selvage to selvage

Fabric A

- Trim panel to 30½" x 36½".

Fabric B

- Cut (4) 1¾" x WOF strips. Subcut into (2) 1¾" x 36½" strips and (2) 1¾" x 33" strips.
- Cut (6) 2¼" x WOF strips for binding.

Fabric C

- Cut (4) 1¾" x WOF strips. Subcut into (2) 1¾" x 39" strips and (2) 1¾" x 35½" strips.

Fabric D

- Cut (4) 1¾" x WOF strips. Subcut into (2) 1¾" x 40½" strips, (2) 1¾" x 35½" strips, and (2) 1¾" x 4" rectangles.

Fabric E

- Cut (5) 1¾" x WOF strips. Subcut into (2) 1¾" x 40½" strips, (2) 1¾" x 38" strips, and (2) 1¾" x 6½" rectangles.

Fabric F

- Cut (5) 4¼" x WOF strips. Subcut into (4) 4¼" x 40½" strips and (2) 4¼" x 14" rectangles.

Fabric G

- Cut (2) 54" x WOF pieces for backing.


INSTRUCTIONS

Use a ¼" seam allowance throughout.

1. Sew (1) 1¾" x 40½" **Fabric D** strip to (1) 1¾" x 4" **Fabric D** rectangle to make (1) 1¾" x 44" **Fabric D** strip. Make 2 units.
2. Sew (1) 1¾" x 40½" **Fabric E** strip to (1) 1¾" x 6½" **Fabric E** rectangle to make (1) 1¾" x 46½" **Fabric E** strip. Make 2 units.
3. Sew (1) 4¼" x 40½" **Fabric F** strip to (1) 4¼" x 14" **Fabric F** rectangle to make (1) 4¼" x 54" **Fabric F** strip. Make 2 units.


QUILT ASSEMBLY

1. Sew (2) 1¾" x 36½" **Fabric B** strips to the sides of the 30½" x 36½" **Fabric A** Panel, followed by (2) 1¾" x 33" **Fabric B** strips to the top and bottom.




2. Sew (2) 1¾" x 39" **Fabric C** strips to the sides of the quilt center, followed by (2) 1¾" x 35½" **Fabric C** strips to the top and bottom.

3. Sew (2) 1¾" x 35½" **Fabric D** strips to the top and bottom of the quilt center, followed by (2) 4¼" x 44" **Fabric D** strips to the sides of the quilt center.

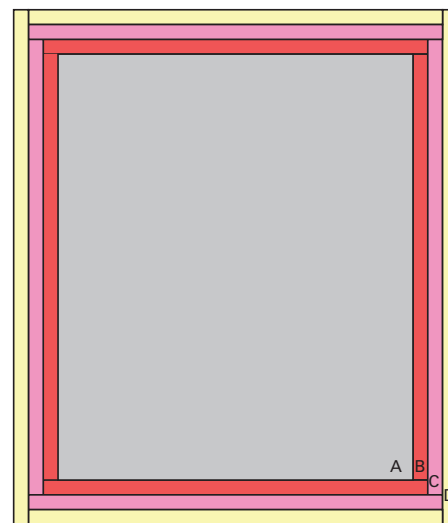

4. Sew (2) $1\frac{3}{4}$ " x 38" **Fabric E** strips to the top and bottom of the quilt center, followed by (2) $4\frac{1}{4}$ " x $46\frac{1}{2}$ " **Fabric E** strips to the sides of the quilt center.
5. Sew (2) $4\frac{1}{4}$ " x $40\frac{1}{2}$ " **Fabric F** strips to the top and bottom of the quilt center, followed by (2) $4\frac{1}{4}$ " x 54" **Fabric F** strips to the sides of the quilt center.

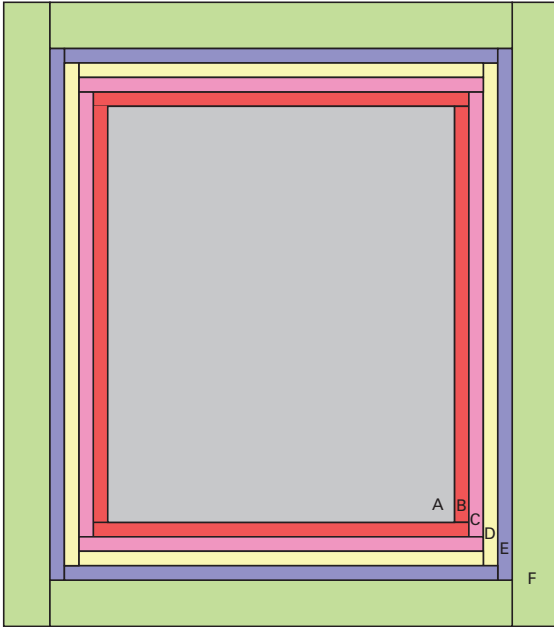

FINISHING

1. Sew (2) 54" x WOF **Fabric G** pieces together along their 54" length to make backing.
2. Layer backing, batting, and quilt top; baste.
3. Quilt as desired.
4. Make double-fold binding using the $2\frac{1}{4}$ " wide **Fabric B** strips, and sew the binding to the quilt using your preferred method.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.