








QUILT SIZE 14" x 39"

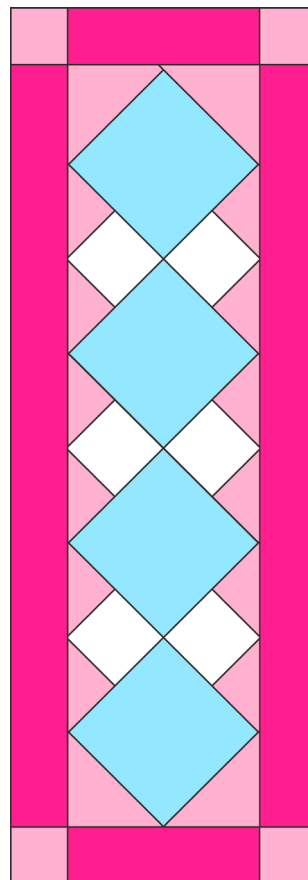



Finished Size: 14" x 39"

FABRIC REQUIREMENTS							
	Fabric A 30911 B ½ YARD		Fabric B 30914Z ¼ YARD		Fabric C 29912 LX ⅜ YARD		Fabric D 30912 X ⅜ YARD
	Fabric E * 29912 BQ ¼ YARD		Fabric F ** 30913 B ¾ YARD	* includes binding ** includes backing			

We recommend that you carefully read through all instructions before starting your project.

CUTTING INSTRUCTIONS

Fabric A:

- Fussy-cut (4) 6½" squares on point

Fabric B:

- Cut (1) 3½" x WOF strip. Subcut into (6) 3½" squares

Fabric C:

- Cut (1) 5½" x WOF strip. Subcut into (3) 5½" squares, (2) 5½" squares and (4) 3" squares

Fabric D:

- Cut (3) 3" x WOF strips. Subcut into (2) 3" x 34" strips and (2) 3" x 9" strips.

Fabric E:

- Cut (3) 2¼" x WOF strips for binding.

PIECED SETTING AND CORNER TRIANGLES

All measurements include ¼" seam allowances. Press in the directions indicated by arrows on diagrams.

1. Sub-cut 3 **Fabric C** 5½" squares in half diagonally twice for 12 side setting triangles (Fig. 1).




Figure 1

2. Sew Fabric C side setting triangles from step 1 to **Fabric B** 3½" squares (Fig. 2). Press. Trim dog ears. Make 6 pieced setting triangles.




Figure 2

3. Sub-cut 2 **Fabric C** 5½" squares in half diagonally for 4 corner setting triangles (Fig. 3).




Figure 3

RUNNER CENTER

4. Referring to Figure 4, lay out **Fabric A** squares, pieced setting triangles and 2 **Fabric C** corner setting triangles in 4 diagonal rows. Sew together pieces in each row. Press seams away from fussy-cut squares.
5. Matching adjacent seams, join rows. Press seams in one direction (Fig. 5).
6. Stitch 2 remaining **Fabric C** corner setting triangles to each end to complete the runner center (Fig. 6). Press. Trim dog ears. Runner center should measure 9" x 34".

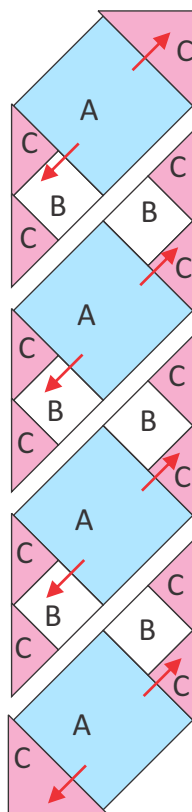


Figure 4

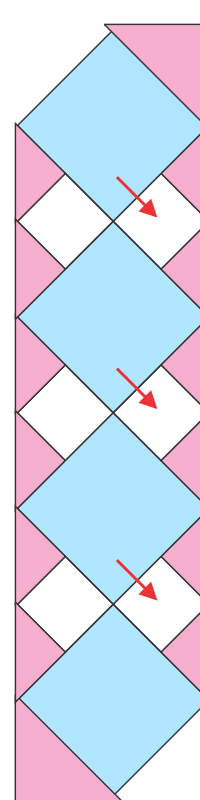


Figure 5

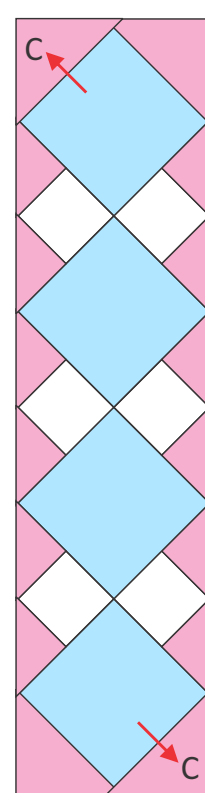


Figure 6

ADD BORDERS

7. Sew **Fabric D** 3" x 34" strip to each side of runner center (Fig. 5). Press to **Fabric D**.

8. Sew **Fabric D** 3" squares to each end of **Fabric D** 3" x 9" strips and press to **Fabric D**. Sew to remaining edges of runner center (Fig. 6). Press all seams to **Fabric D**.

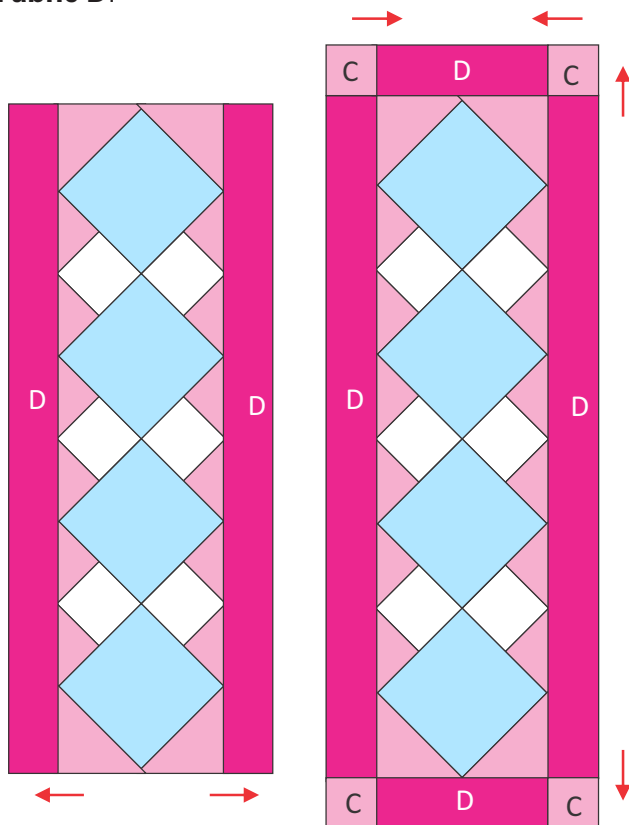


Figure 7

Figure 8

FINISH RUNNER

9. Cut **Fabric F** backing in half, parallel to selvage and sew together (Fig.9). Press to one side.

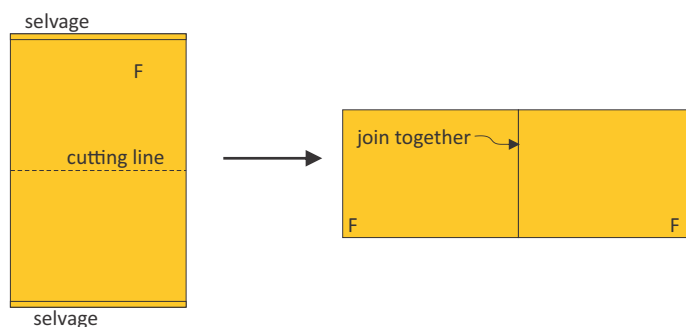


Figure 9

10. Layer runner top, batting and backing; baste.

11. Quilt as desired.

12. Make double-fold binding using the 2 1/4" wide **Fabric E** strips, and sew the binding to the quilt using your preferred method.